

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/520480



(43) International Publication Date
22 January 2004 (22.01.2004)


PCT

(10) International Publication Number
WO 2004/007777 A2

- (51) International Patent Classification⁷: C21C 5/56, (74) Agent: HERMAN DE GROOT, Johan, Willem; Corus Technology BV, P.O. Box 1000, NL-1970 CA IJmuiden (NL).
- (21) International Application Number: PCT/EP2003/007527 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 10 July 2003 (10.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02077780.1 10 July 2002 (10.07.2002) EP
02077781.9 10 July 2002 (10.07.2002) EP
- (71) Applicant (*for all designated States except US*): CORUS TECHNOLOGY BV [NL/NL]; P.O. Box 10000, NL-1970 CA IJmuiden (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): DENYS, Mark, Bernard [NL/NL]; Gaaspstraat 44-1, NL-1079 VE Amsterdam (NL). MELIER, Hendrikus, Koenraad, Albertus [NL/NL]; De Waterdief 149, NL-1911 JR Uitgeest (NL).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METALLURGICAL VESSEL

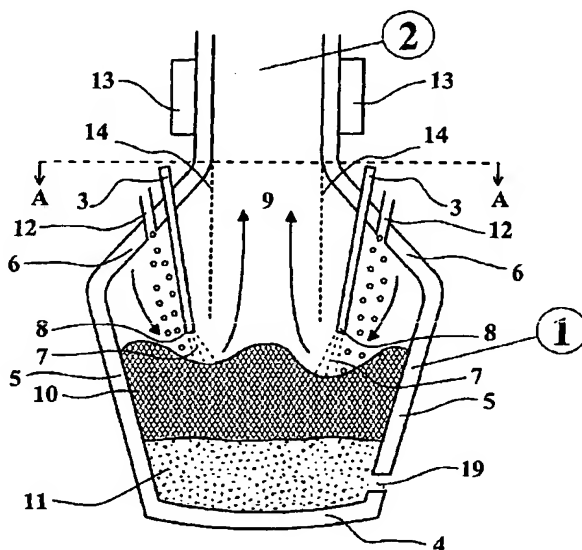

(57) Abstract: Metallurgical vessel for iron and steel making comprising a bottom portion, a sidewall and a lance arrangement of at least two lances for supplying oxygen containing gas to the interior of the vessel in operation wherein each lance comprises an end portion for emitting oxygen containing gas characterised in that the lance arrangement is configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the center of the vessel.

WO 2004/007777 A2

WO 2004/007777 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METALLURGICAL VESSEL

The present invention relates to a metallurgical vessel for iron and steel making comprising a bottom portion, a sidewall and a lance arrangement of at least two lances for
5 supplying oxygen containing gas to the interior of the vessel in operation wherein each lance comprises an end portion for emitting oxygen containing gas. The present invention also relates to methods of iron making.

The object of the present invention is to provide a metallurgical vessel which can be used on a large scale with increased production efficiency and reduced clogging of equipment
10 positioned in a roof portion of the vessel.

The present invention improves on the prior art as the lance arrangement is configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the centre of the vessel.

15 The term post-combusted gases refers to the gases which are produced during reactions in the metallurgical vessel and are subsequently at least partially post combusted. The term centre of the vessel refers to the central column area of the vessel surrounding and including the central axis of the vessel. When the metallurgical vessel is upright the central axis extends essentially vertically through the centre of the vessel.

20 The present invention has the considerable advantage that it can be successfully used for vessels of large diameter by stimulating what has been found to be a very favourable gas flow in the body of the vessel. The gas flow results in reduced heat loads on the walls whilst the plurality of lances ensure a good distribution of oxygen containing gas and therefore good heat distribution over the vessel area, thereby increasing production efficiency. The present
25 invention also mitigates the problem of clogging of and damage to, e.g. ports, seals, sensors and measuring equipment positioned in the roof portion of the vessel which are expensive and difficult to replace or repair. This problem of clogging arises when particulates are entrained in the upward flow of post combusted gases directed to the roof portion of the vessel. The lance configuration of the present invention creates a substantially downward flow of post combusted
30 gases at the sidewall whilst the substantially upwardly directed flow occurs at the centre of the vessel. Any particulates entrained in the upward flow therefore pass up the centre of the vessel and have less chance of coming into contact with any of the equipment, ports, seals or sensors projecting through the roof. Examples of processes for producing molten metal directly from metal oxides include the use of electric furnaces as the major source of energy for the smelting
35 reactions, the Romelt process, the DIOS process, the AISI process, the Hismelt process and using a cyclone convertor furnace.

EP 0 735 146 discloses a metallurgical vessel of the converter type in which pre-reduced iron ore undergoes a final reduction. The bottom portion of the metallurgical vessel contains the iron bath whilst the wall or side wall extends upwardly from the bottom portion, enclosing the
40 slag layer. The roof portion extends from the top of the sidewall over the interior of the vessel

CONFIRMATION COPY

and connects with the melting cyclone. A plurality of lances project through the wall of the metallurgical vessel and supply oxygen to the interior of the vessel. The lances are specified as being orientated vertically as much as possible in order to achieve the same effect as when using a central lance.

5 As mentioned above the present invention improves on the prior art as the lances are configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the centre of the vessel. The substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed
10 flow of post-combusted gases in the centre of the vessel achieved in operation can be directly and positively verified by a person skilled in the art by, for example, calculating and monitoring the heat losses per square metre in the side wall and roof portion of the vessel.

 The side walls and roof section of a metallurgical vessel may comprise metal staves or tubes through which water flows for the purpose of cooling the vessel and/or refractory material
15 that can withstand high temperatures. The side wall and roof section of a metallurgical vessel are usually equipped with temperature sensors.

 The temperature sensors may be thermocouples that measure the cooling water temperature or thermocouples that measure the refractory wall temperature in various parts along the height and circumference of the side wall and roof portions of the vessel. When the
20 cooling water temperature measurement is combined with a cooling water flow measurement, a person skilled in the art can calculate and monitor the heat losses per square meter (heat fluxes) in different parts along the height and circumference of the side wall and roof portions of the vessel. The skilled person can thus verify whether there is in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a
25 substantially upwardly directed flow of post-combusted gases in the centre of the vessel by monitoring the side wall and roof portion temperatures of the vessel.

 In a conventional metallurgical vessel with a single central lance or vertically orientated lances the combustion created by the lance(s), creates a strong expansion of gases in the centre of the vessel that leads to a flow of hot combustion off gases towards and up the side
30 walls.

 In a metallurgical vessel according to the present invention the substantially downwardly directed flow of post-combusted gases at the side wall of the vessel has a cooling effect on the side wall and thus results in lower refractory temperatures or heat fluxes. The hot post combusted gases flow substantially upwardly through the centre of the vessel and thus do
35 not contact the side wall. The present invention also results in a decrease in refractory temperatures or heat fluxes particularly in the area of the side wall in the vicinity of the lances.

 In the metallurgical vessel of the present invention at least one of the lances may be provided with means for emitting a plurality of jets of oxygen containing gas from its end portion. Such a lance can emit oxygen over a wider surface area of the contents of the vessel

compared to a single jet. Each of the lances may be provided with means for emitting a plurality of jets of oxygen containing gas from its end portion.

5 The lances are preferably configured with at least one of the lances projecting through the roof portion of the metallurgical vessel. The roof portion of the vessel extends from the top of the sidewall. If a melting cyclone is positioned above and in open communication with the vessel then the roof portion extends from the top of the sidewall to the melting cyclone. At least one of the lances thus penetrates through part of the vessel that does not come into contact with the contents of the vessel thereby avoiding damage to the seal around the lance at the point it penetrates the vessel. Each of the lances may project through a roof portion of the metallurgical vessel.

10 At least one lance is preferably arranged to direct the oxygen containing gas inwards towards the central axis of the metallurgical vessel. Each of the lances may be arranged to direct the oxygen containing gas inwards towards the central axis of the metallurgical vessel. Directing the gas inwards towards the central axis of the vessel creates an area of low pressure at the lance end portion resulting in post combusted gas being entrained downward at the sidewall towards the end portion of the lance whilst an upward flow of post combusted gas is generated up through the centre of the vessel.

15 At least one of the lances may be inclined from the vertical with its end portion inclined towards the central axis of the metallurgical vessel. Inclining a lance directs the oxygen containing gas inwards towards the central axis of the metallurgical vessel and improves the distribution of oxygen containing gas over the surface of the contents of the vessel. Each of the lances may be inclined from the vertical with its end portion inclined towards the central axis of the metallurgical vessel.

20 The end portion of at least one lance may also be configured to direct the oxygen containing gas towards the central axis of the metallurgical vessel at a greater angle from the vertical than the angle of inclination of the lance thereby increasing the upward and downward gas flow generated in the vessel. Each of the lances may be configured to direct the oxygen containing gas towards the central axis of the metallurgical vessel at a greater angle from the vertical than the angle of inclination of the lance.

25 The lances may be adjustable in height and therefore able to be positioned at an optimal height over the surface of the contents of the vessel when the vessel is at varying levels of fullness. The angle of inclination of the lances may also be adjustable to enable the distribution of oxygen containing gas over the surface of the contents of the vessel to be optimised.

30 The lance end portions may all be positioned at an equal distance from the sidewall to achieve the most effective heat distribution over the surface of the vessel contents to maximise production efficiency. Preferably three or more lances supply oxygen containing gas to the contents of the vessel to ensure optimum heat distribution and production efficiency.

35 Particulate material may preferably be added to the metallurgical vessel via feed chutes positioned at a short distance from the lances. The substantially downward gas flow in the vicinity of the sidewall thus entrains the particulate material in the form of e.g. coal fines and

transports it down towards the end portions of the oxygen lances and the slag layer. This avoids the problem of a significant proportion of any particulate material added to the vessel being lost, due to particles being entrained in the upward gas flow, before reacting with the contents of the vessel. The preferred embodiment thus results in a significantly lower loss of particulate material, such as coal fines, from the vessel and a higher production efficiency as a greater proportion of the particulate material is available as a reactant. The gas leaving the metallurgical vessel in operation (off gas) can be sampled, as is known in the art, to verify the reduction in particulate material in the off gas. The combustion degree of the off gas will also improve as the coal pyrolysis products, which evolve spontaneously when coal comes into the hot atmosphere inside the metallurgical vessel during operation, will be entrained in the downward flow of gas at the side wall and will be combusted rather than being blown out of the vessel. The combustion degree of the off gas can also be ascertained by off gas sampling and analysis as is known in the art.

The loss of particulate material is further minimised if each lance has a corresponding feed chute so that the particulate material added through the chute is entrained into the substantially downward gas flow. The optimal position for each chute is to be positioned between the lance and the sidewall of the metallurgical vessel, in a radial direction, where the substantially downward flow of the post combusted gases is at a maximum.

The sidewall of the vessel preferably comprises a lower portion for accommodating a molten metal bath and part of a slag layer in use and an upper portion for accommodating the remainder of the slag layer in use, wherein the at least two lances project into the upper portion of the vessel and supply oxygen containing gas to the upper portion of the vessel and wherein a plurality of tuyeres are arranged around the circumference of the lower portion of the vessel suitable for supplying gas and/or liquid and/or solids and/or plasma into the slag layer in the lower portion of the vessel. The at least two lances supply oxygen containing gas, and thereby heat, to the slag in the upper portion of the vessel whilst the gas and/or liquid and/or solids and/or plasma supplied by the tuyeres ensure that the lower slag layer does not become quiescent. Quiescence results in a cooling of the lower slag layer and a loss of productivity.

The tuyeres supply gas and/or liquid and/or solids and/or plasma directly to the lower slag layer whereas gas is injected through the bottom of the vessel into the molten metal in bottom stirring. The preferable aspect of the invention thus does not generate high flow velocities in the molten metal thereby avoiding one of the major drawbacks of bottom stirring namely the fast erosion of the vessel wall in the part of the vessel containing the molten metal. The supply of gas and/or liquid and/or solids and/or plasma to the slag layer in the lower portion of the vessel by the tuyeres thus does not cause erosion of the refractory lining in the hot metal zone but it does maintain productivity by stirring the lower slag layer. Stirring the lower slag layer maximises reactions within the lower slag layer and ensures it does not become quiescent. The supply of combustible gas and/or liquid and/or solids by the tuyeres also increases heat transfer from the slag layer to the molten metal in the lower portion of the

vessel. The tuyeres are also easier to maintain as they are positioned above the tap level of the vessel.

5 The diameter of the lower portion of the metallurgical vessel is preferably smaller than that of the upper portion. The tuyeres are arranged around the circumference of the lower part of the vessel and therefore the jets emitted by the tuyeres will penetrate into the slag layer in the lower portion of the vessel before rising through the slag into the upper portion of the vessel. Any "hot spots" i.e. areas of higher temperature, created by the gas and/or liquid and/or solids and/or plasma supplied by the tuyeres, in the slag layer in the upper portion of the vessel will therefore be sufficiently distant from the wall of the vessel to ensure that no increase in corrosion and/or erosion of the wall occurs.

10 The tuyeres may preferably comprise oxy-fuel burners to act as a direct heat source in the slag layer in the lower portion of the vessel. The oxy-fuel burners will increase the productivity of the reactor by increasing the occurrence of the endothermic reduction reactions and thereby increasing the reduction capacity of the slag layer.

15 The metallurgical vessel of the present invention preferably comprises a melting cyclone positioned above, and in open communication with, the vessel. None of the oxygen lances thus has to withstand the heat and corrosive environment of the cyclone as they do not extend through the cyclone. Such a melting cyclone is disclosed in Dutch patent NL C 257692 and EP 0735146.

20 The lances are preferably positioned to avoid contact with molten material passing downwards from the melting cyclone to the metallurgical vessel so that the molten material does not damage the lances. Replacement and/or repair of damaged lances is costly and reduces production efficiency.

25 The present invention also relates to a method of reducing iron oxide into iron using a metallurgical vessel in accordance with the invention and comprising the steps of supplying iron oxides to the vessel and reducing the iron oxides by supplying carbonaceous material to the vessel and supplying oxygen containing gas to the iron oxides via lances. The oxygen containing gas may be supplied to the upper portion of the metallurgical vessel via the lances, and gas and/or liquid and/or solids and/or plasma may be supplied into the slag layer in the lower portion of the vessel via the plurality of tuyeres.

30 The present invention also relates to a method of iron making comprising the steps of:

- conveying iron oxide or pre-reduced iron oxide into a metallurgical vessel,
- supplying oxygen containing gas to the metallurgical vessel via a lance arrangement of at least two lances configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the centre of the vessel,
- supplying carbonaceous material to the vessel.

35 The present invention also relates to a method of iron making in accordance with the method above comprising the steps of:

40

- conveying iron-oxide containing material into a melting cyclone,
 - pre-reducing said iron-oxide containing material by means of reducing post combusted gases originating from the metallurgical vessel,
 - at least partly melting the iron-oxide containing material in the melting cyclone by
5 supplying oxygen containing gas to the melting cyclone and effecting a further post combustion in said reducing post combusted gases,
 - permitting the pre-reduced and at least partly melted iron-oxide containing material to pass downwardly from said melting cyclone into the metallurgical vessel in which final reduction takes place and
10 - effecting the final reduction in the metallurgical vessel in a slag layer by supplying oxygen containing gas to the metallurgical vessel, via the lances, and supplying coal to the metallurgical vessel and thereby forming a reducing gas and effecting at least partial post combustion in said reducing gas in said metallurgical vessel by means of said oxygen containing gas supplied thereto.
- 15 The present invention preferably relates to a method of iron making as set out above including the step of:
- supplying gas and/or liquid and/or solids and/or plasma into a slag layer in a lower portion of the vessel.

20 An alternative metallurgical vessel may comprise a lower portion for accommodating a molten metal bath and part of a slag layer in use, an upper portion for accommodating the remainder of the slag layer in use and a plurality of lances which project into the upper portion of the vessel and supply oxygen containing gas to the upper portion of the vessel characterised in that a plurality of tuyeres are arranged around the circumference of the lower portion of the vessel suitable for supplying gas and/or liquid and/or solids and/or plasma into the slag layer in the
25 lower portion of the vessel.

The plurality of lances supply oxygen containing gas, and thereby heat, to the slag in the upper portion of the vessel whilst the gas and/or liquid and/or solids and/or plasma supplied by the tuyeres ensure that the lower slag layer does not become quiescent. Quiescence results in a cooling of the lower slag layer and a loss of productivity. The tuyeres supply gas and/or liquid
30 and/or solids and/or plasma directly to the lower slag layer whereas gas is injected through the bottom of the vessel into the molten metal in bottom stirring. The preferable aspect of the invention thus does not generate high flow velocities in the molten metal thereby avoiding one of the major drawbacks of bottom stirring namely the fast erosion of the vessel wall in the part of the vessel containing the molten metal.

35 The supply of gas and/or liquid and/or solids and/or plasma to the slag layer in the lower portion of the vessel by the tuyeres thus does not cause erosion of the refractory lining in the hot metal zone but it does maintain productivity by stirring the lower slag layer. Stirring the lower slag layer maximises reactions within the lower slag layer and ensures it does not become quiescent. The supply of combustible gas and/or liquid and/or solids by the tuyeres
40 also increases heat transfer from the slag layer to the molten metal in the lower portion of the

vessel. The tuyeres are also easier to maintain as they are positioned above the tap level of the vessel.

5 The diameter of the lower portion of the metallurgical vessel is preferably smaller than that of the upper portion. The tuyeres are arranged around the circumference of the lower part of the vessel and therefore the jets emitted by the tuyeres will penetrate into the slag layer in the lower portion of the vessel before rising through the slag into the upper portion of the vessel. Any "hot spots" i.e. areas of higher temperature, created by the gas and/or liquid and/or solids and/or plasma supplied by the tuyeres, in the slag layer in the upper portion of the vessel will therefore be sufficiently distant from the wall of the vessel to ensure that no increase in

10 corrosion and/or erosion of the wall occurs.

The tuyeres may preferably comprise oxy-fuel burners to act as a direct heat source in the slag layer in the lower portion of the vessel. The oxy-fuel burners will increase the productivity of the reactor by increasing the occurrence of the endothermic reduction reactions and thereby increasing the reduction capacity of the slag layer.

15

BRIEF INTRODUCTION TO THE DRAWINGS

Embodiments of the invention will now be described by way of non-limitative examples, with reference to the accompanying drawings, in which:

Figure 1 shows an apparatus in accordance with the invention.

20 Figure 2 shows a view along axis "A" of figure 1.

Figure 3 shows a simulation of a section of the apparatus with one lance projecting into the vessel section and shows the simulated trajectory of coal particles added at a short distance from the lance.

Figure 4 shows simulation of a section of the apparatus with one lance projecting into the vessel section and shows the simulated trajectory of coal particles added between the lances.

25

Figure 5 shows a lance end portion having four ports for emitting four jets of oxygen containing gas.

Figure 6 shows a particular embodiment of the invention.

Figure 7 shows the alternative metallurgical vessel.

30

DESCRIPTION OF A PREFERRED EMBODIMENT

The apparatus in figure 1 comprises a metallurgical vessel 1, a melting cyclone 2 (details not shown) and a plurality of lances 3, of which two are shown. More lances may be used depending on, for example, the size of the vessel and the performance parameters of the

35 lances. The metallurgical vessel itself comprises a bottom portion 4, a sidewall 5 and a roof portion 6 which extends from the top of the sidewall 5 to the melting cyclone 2. The metallurgical vessel contains an iron bath 11 with a slag layer 10 on top and the vessel comprises at least one tap hole 19 for tapping off molten iron and slag.

Oxygen containing gas is supplied to the interior of the vessel by the lances 3 which acts

40 to finally reduce the pre-reduced iron oxide in the slag layer. During the final reduction a

process gas comprising reducing carbon monoxide is produced and at least partially combusted above the slag layer 10, thereby releasing heat needed for the final reduction. The at least partially post combusted gas resulting from the post combustion is referred to as post combusted gas. Particulate coal is supplied to the interior of the vessel 1 via the feed chutes

5 12. The lances 3 project into the vessel through the roof 6 and are configured to create a substantially downwardly directed flow of the post-combusted gas at the sidewall 5 of the vessel and a substantially upwardly directed flow of post combusted gas in the centre of the vessel 9. The upwardly directed post combusted gas, comprising reducing carbon monoxide, is further post-combusted in the melting cyclone 2 with oxygen containing gas supplied to the

10 melting cyclone. Iron oxide supplied to the melting cyclone via apparatus 13 is pre-reduced approximately to FeO and at least partly melted. The pre-reduced iron oxide 14 then falls or flows down into the metallurgical vessel 1. When the metallurgical vessel is upright the central axis extends essentially vertically through the centre of the vessel.

During operation the lances extend to above the slag layer 10 and the lances are

15 adjustable in height so they can be positioned optimally for supplying oxygen containing gas even when the vessel is at varying levels of fullness. The lances 3 are inclined from the vertical and the end portions 8 are configured to direct a jet 7 or jets of oxygen containing gas towards the centre of the vessel either at the same inclination of the lance or at greater angle from the vertical than the inclination of the lance.

20 Figure 5 shows in detail the end portion 8 of a lance 3 having four ports 17 which emit four jets 18 of oxygen containing gas. The lances 3 are positioned so that their ends are all of equal distance from the sidewall. The number of lances projecting into the vessel can be varied depending on the size of the metallurgical vessel and the surface area of slag covered by each lance. The number of ports in the end portion of the lances can also be varied.

25 Figure 2 shows the positions of the three feed chutes 12 with respect to the three oxygen lances 3 of figure 1.

Figure 3 shows a section of the vessel 1, a lance 3 projecting into the section of the vessel and the trajectories 15 of coal particles added to the vessel. The advantage obtained by adding coal particles a short distance from the lances is clear as the particles are entrained

30 towards the slag layer with the substantially downward flow of post-combusted gases at the sidewall of the vessel. In contrast, figure 4 shows the trajectories 16 of coal particles added between the lances. It can be seen that the majority of the particles are entrained in the upwardly directed flow of post-combusted gases in the centre of the vessel and leave the vessel. A significant proportion of the coal particles added thus never become available as

35 reactants in the slag layer.

Figure 6 shows a metallurgical vessel 1, a melting cyclone 2 (details not shown) and a plurality of lances 3, of which two are shown. The lances 3 project into the vessel through the roof 6 and are configured to create a downwardly directed flow of the post-combusted gas at the sidewall 5 of the vessel and an upwardly directed flow of post combusted gas in the centre

40 of the vessel 9. The lances 3 are inclined from the vertical and the end portions 8 are

configured to direct a jet 7 or jets of oxygen containing gas towards the centre of the vessel either at the same inclination of the lance or at greater angle from the vertical than the inclination of the lance. The side wall 5 of the metallurgical vessel comprises an upper portion 21 and a lower portion 20. The lower portion 20 accommodates the molten metal bath 11 and part of the slag layer 10 in use. The upper portion 21 accommodates the remainder of the slag layer in use and the lances 3 project into the upper portion of the vessel and supply oxygen containing gas to the slag layer 6 in the upper portion 3 of the vessel. A plurality of tuyeres 22 (of which two are shown) are arranged around the circumference of the lower portion of the vessel suitable for supplying gas and/or liquid and/or solids (such as recycled dust) and/or plasma into the slag layer in the lower portion 20 of the vessel. The number of tuyeres arranged around the circumference of the lower part of the vessel can be varied depending on the size of the vessel and the performance parameters of the tuyeres. The tuyeres may comprise oxy-fuel burners. The remainder of the details in figure 6 are in accordance with and numbered as the features illustrated in figures 1-5 and described above.

Figure 7 shows the alternative metallurgical vessel 31 and a melting cyclone 38. Details of the melting cyclone are not shown. The metallurgical vessel itself comprises a lower portion 32 which accommodates the iron bath 39 and part of the slag layer 36 and comprises at least one tap hole 41 for tapping off molten iron and slag. The vessel also comprises an upper portion 33, which accommodates the remainder of the slag layer 36, and a roof portion 34. The slag layer 36 thus rests on top of the iron bath 39 and extends from the lower portion of the vessel 32 into the upper portion 33. Pre-reduced iron oxide 40 falls or flows from the melting cyclone into the metallurgical vessel and is finally reduced in the slag layer. A plurality of lances 35 supply oxygen containing gas to the slag layer 36 in the upper portion 33 of the vessel. Two lances are shown in the figure but more may be present depending on, for example, the size of the vessel and the performance parameters of the lances. A plurality of tuyeres 37 are arranged around the circumference of the lower portion of the vessel. The tuyeres are suitable for supplying gas and/or liquid and/or solids (such as recycled dust) and/or plasma to the slag layer in the lower portion 32 of the vessel. The number of tuyeres arranged around the circumference of the lower part of the vessel can be varied depending on the size of the vessel and the performance parameters of the tuyeres. The tuyeres may comprise oxy-fuel burners. During the final reduction of the pre-reduced iron oxide a process gas comprising reducing CO is produced that is partially post-combusted above the slag layer 36 in the vessel 31, whereby heat needed for the final reduction is released. The reducing process gas rises and is further post-combusted in the melting cyclone 38 with oxygen containing gas supplied to the melting cyclone. Iron oxide supplied to the melting cyclone is pre-reduced approximately to FeO and at least partly melted in the melting cyclone. The pre-reduced iron oxide 40 then falls or flows down into the metallurgical vessel 31.

While the invention has been illustrated by a particular embodiment, variations and modifications are possible within the scope of the inventive concept.

CLAIMS

1. Metallurgical vessel for iron and steel making comprising a bottom portion, a sidewall and a lance arrangement of at least two lances for supplying oxygen containing gas to the interior of the vessel in operation wherein each lance comprises an end portion for emitting oxygen containing gas characterised in that the lance arrangement is configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the centre of the vessel.
2. Metallurgical vessel according to claim 1 wherein at least one of the lances is provided with means for emitting a plurality of jets of oxygen containing gas from its end portion.
3. Metallurgical vessel according to claim 1 or 2 wherein at least one of the lances projects through a roof portion of the metallurgical vessel.
4. Metallurgical vessel according to any of the previous claims wherein at least one lance is arranged to direct the oxygen containing gas towards a central axis of the metallurgical vessel.
5. Metallurgical vessel according to claim 4 wherein at least one of the lances is inclined from the vertical with its end portion inclined towards the central axis of the metallurgical vessel.
6. Metallurgical vessel according to claim 5 wherein the end portion of the lance is configured to direct the oxygen containing gas towards the central axis of the metallurgical vessel at a greater angle from the vertical than the angle of inclination of the lance.
7. Metallurgical vessel according to any of the previous claims wherein the end portions of the lances are all of equal distance from the sidewall.
8. Metallurgical vessel according to any of the previous claims wherein the metallurgical vessel comprises three or more lances.
9. Metallurgical vessel according to any of the previous claims wherein at least one feed chute, for adding material to the vessel, is positioned at a short distance from a lance.
10. Metallurgical vessel according to claim 9 wherein a plurality of feed chutes project through a roof portion of the metallurgical vessel.

11. Metallurgical vessel according to claim 9 wherein each lance has a corresponding feed chute.
- 5 12. Metallurgical vessel according to claim 11 wherein each feed chute is positioned between the lance and the sidewall of the metallurgical vessel in a radial direction.
- 10 13. Metallurgical vessel according to any of the preceding claims wherein the sidewall comprises a lower portion for accommodating a molten metal bath and a slag layer and an upper portion for accommodating a slag layer and wherein the at least two lances for supplying oxygen containing gas to the upper portion of the vessel project into the upper portion of the vessel and wherein a plurality of tuyeres for supplying gas and/or liquid and/or solids and/or plasma into the slag layer in the lower portion of the vessel are arranged around the circumference of the lower portion of the vessel.
- 15 14. Metallurgical vessel according to claim 13 wherein the diameter of the lower portion of the vessel is smaller than that of the upper portion.
- 20 15. Metallurgical vessel according to claims 13 or 14 characterised in that the tuyeres comprise oxy-fuel burners.
16. Metallurgical vessel according to any one of claims 1 to 15 comprising a melting cyclone positioned above and in open connection with the metallurgical vessel.
- 25 17. Metallurgical vessel according to claim 16 wherein the lances are positioned to avoid contact with molten material passing downwards from the melting cyclone to the metallurgical vessel.
- 30 18. Method of reducing iron oxides into iron using a metallurgical vessel in accordance with any one of claims 1-12 comprising the steps of supplying iron oxides to the vessel and reducing the iron oxides by supplying carbonaceous material to the vessel and supplying oxygen containing gas to the iron oxides via the lances.
- 35 19. Method of reducing iron oxide to iron using a metallurgical vessel in accordance with any one of claims 13-17, comprising the steps of supplying iron oxide to the vessel, supplying oxygen containing gas to the upper portion of the metallurgical vessel via the lances, supplying carbonaceous material to the iron oxide and supplying gas and/or liquid and/or solids and/or plasma into the slag layer in the lower portion of the vessel via the plurality of tuyeres.

20. Method of reducing iron oxide according to claim 19 characterised in that the tuyeres supply oxygen containing gas into the lower slag layer.
21. Method of iron making comprising the steps of:
- 5 - conveying iron oxide or pre-reduced iron oxide into a metallurgical vessel
- supplying oxygen containing gas to the metallurgical vessel via a lance arrangement of at least two lances configured so as to achieve in operation a substantially downwardly directed flow of post-combusted gases at the side wall of the vessel and a substantially upwardly directed flow of post-combusted gases in the centre of the
- 10 vessel,
- supplying carbonaceous material to the vessel.
22. Method according to claim 1 comprising the steps of:
- conveying iron-oxide containing material into a melting cyclone,
- 15 - pre-reducing said iron-oxide containing material by means of reducing post combusted gases originating from the metallurgical vessel,
- at least partly melting the iron-oxide containing material in the melting cyclone by supplying oxygen containing gas to the melting cyclone and effecting a further post combustion in said reducing post combusted gases,
- 20 - permitting the pre-reduced and at least partly melted iron-oxide containing material to pass downwardly from said melting cyclone into the metallurgical vessel in which final reduction takes place and
- effecting the final reduction in the metallurgical vessel in a slag layer by supplying oxygen containing gas to the metallurgical vessel, via the lances, and supplying
- 25 coal to the metallurgical vessel and thereby forming a reducing gas and effecting at least partial post combustion in said reducing gas in said metallurgical vessel by means of said oxygen containing gas supplied thereto.
- 30 23. Method of iron making according to claim 21 or 22 comprising the step of:
- supplying gas and/or liquid and/or solids and/or plasma into a slag layer in a lower portion of the vessel.

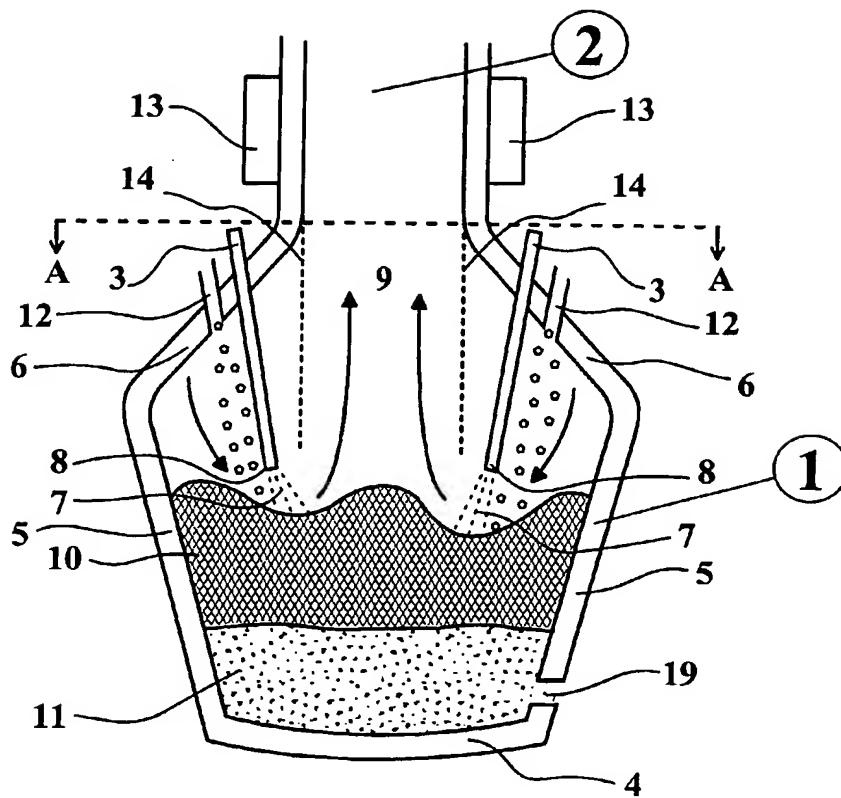


Fig. 1

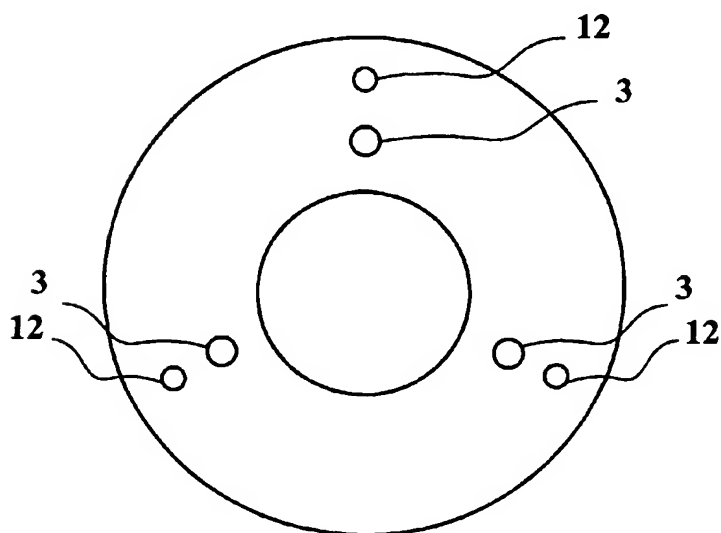


Fig. 2

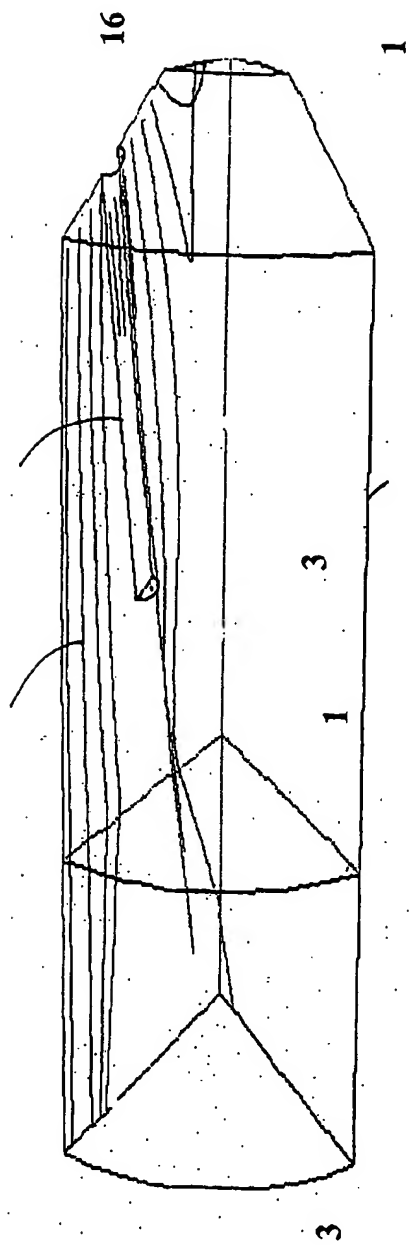


Fig. 3

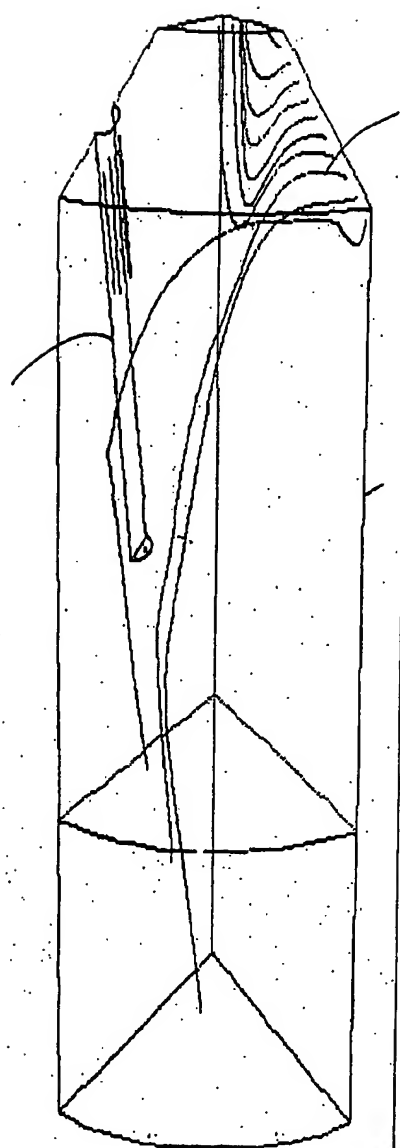


Fig. 4

Fig. 3

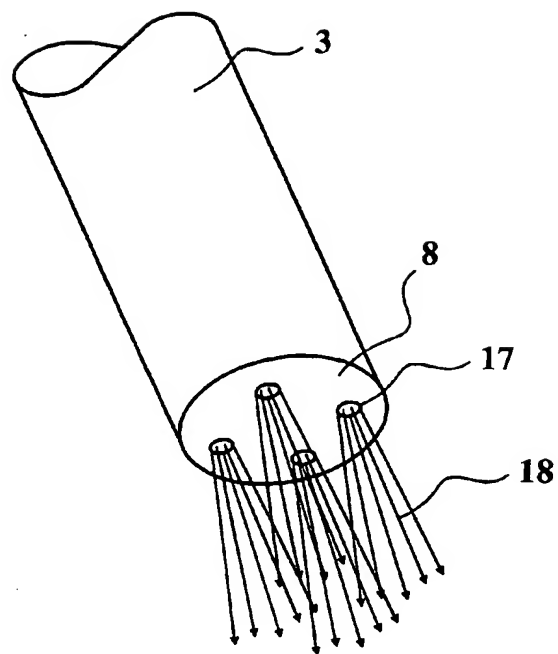
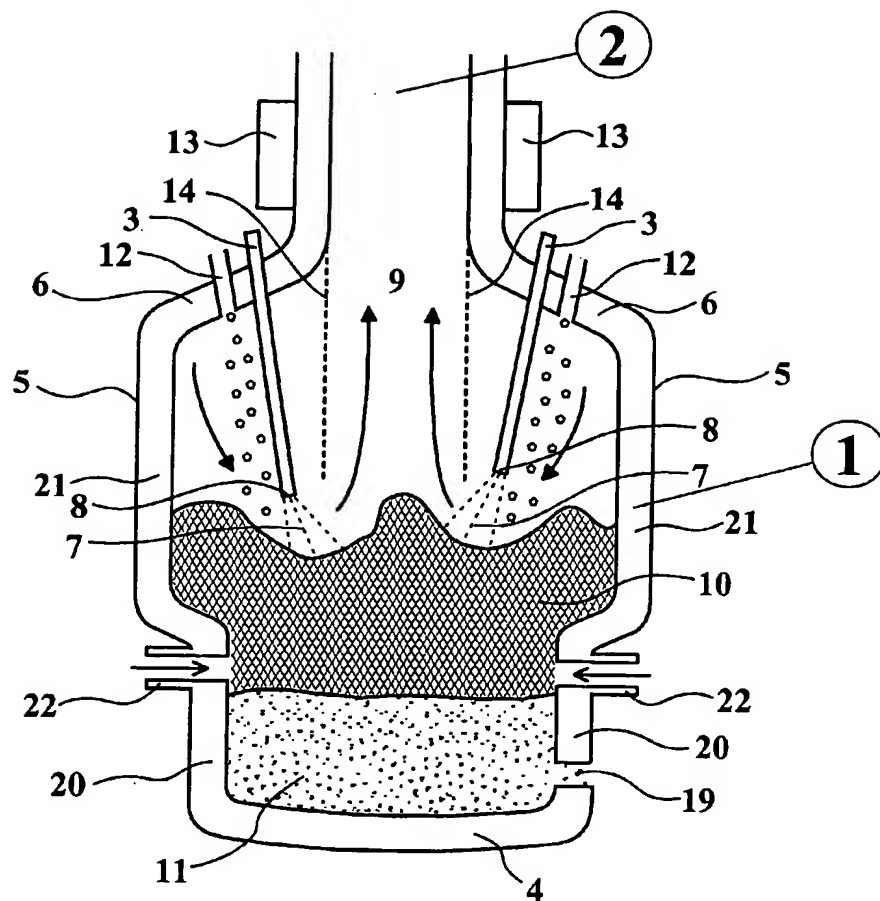


Fig. 5

**Fig. 6**

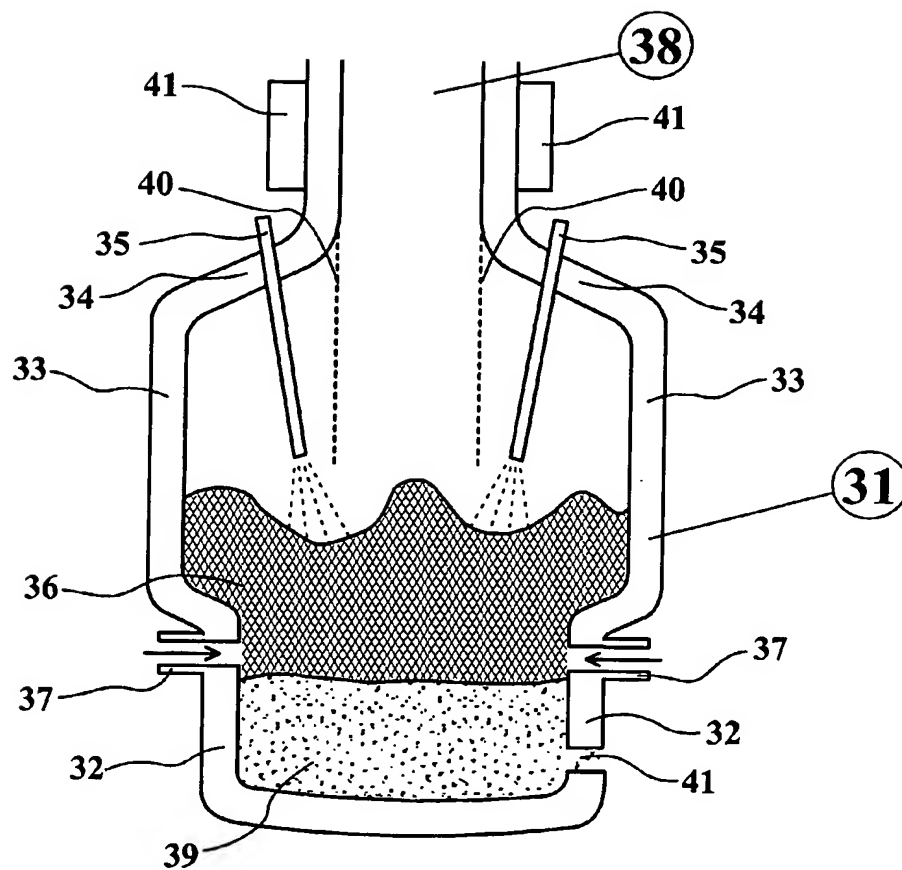


Fig. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/07527

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C21C5/56 C21C5/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C21C C21B F27B F27D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 195 985 A (BROTMANN KARL) 1 April 1980 (1980-04-01)	1, 3-8, 18, 19, 21-23
Y	abstract column 1, line 5 - line 10 column 4, line 26 - line 45 column 6, line 48 - column 7, line 2 column 11, line 41 - line 68 claims 1, 12; figure -/-	2

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

17 February 2004

Date of mailing of the international search report

24/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3018

Authorized officer

Ceulemans, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/07527

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 399 983 A (METZ PAUL) 23 August 1983 (1983-08-23)	1-3,7-9, 13,18, 19,21-23 20
A	abstract column 1, line 7 - line 9 column 1, line 55 -column 2, line 14 column 2, line 31 -column 3, line 3 column 3, line 16 - line 20 column 3, line 41 - line 52 claims 1,2; figure ---	
X	WO 00 22176 A (TECHNOLOGY RESOURCES PTY, LTD) 20 April 2000 (2000-04-20)	1,3-5, 7-10,13, 16-19, 21-23
	abstract page 1 page 1, line 6 - line 23 page 2, line 5 -page 3, line 10 page 6, line 1 - line 8 page 9, line 37 -page 10, line 17 page 11, line 21 -page 12, line 23 claims 1,5-9; figure 1 ---	
X	EP 0 735 146 A (HOOGOVENS STAAL BV) 2 October 1996 (1996-10-02)	1,3-12, 16-18, 21,22 13,14
A	cited in the application abstract column 1, line 5 - line 12 column 2, line 22 - line 25 column 2, line 48 -column 3, line 18 column 3, line 39 - line 55 column 4, line 20 - line 45 claims 1,4,8-10; figures 2,3 ---	
Y	US 5 681 526 A (ZHANG XIAODONG) 28 October 1997 (1997-10-28)	2
	abstract column 1, line 7 - line 16 column 2, line 17 - line 33 column 2, line 61 -column 3, line 56 claims 1,8,9,15; figures 1,3,6 ---	
A	EP 0 756 012 A (KAWASAKI STEEL CO) 29 January 1997 (1997-01-29)	1-8
	page 4, line 4 - line 10; figures 1-3 ---	
A	US 4 852 858 A (WEBER RALPH) 1 August 1989 (1989-08-01)	15,20
	column 4, line 12 - line 21 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/07527

FCI/EP 03/07527

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4195985	A	01-04-1980	DE 2755165 A1	26-07-1979
			DE 2838983 A1	20-03-1980
			AR 218949 A1	15-07-1980
			AT 377006 B	25-01-1985
			AT 874878 A	15-06-1984
			AU 530510 B2	21-07-1983
			AU 4237478 A	14-06-1979
			BE 872620 A1	30-03-1979
			BG 60214 B2	30-12-1993
			BR 7808087 A	07-08-1979
			CA 1123608 A1	18-05-1982
			CZ 7808115 A3	16-02-1994
			DD 140757 A5	26-03-1980
			ES 475778 A1	01-04-1979
			FR 2411239 A1	06-07-1979
			FR 2532327 A1	02-03-1984
			GB 2011477 A ,B	11-07-1979
			HU 182867 B	28-03-1984
			IN 149859 A1	15-05-1982
			IT 1107587 B	25-11-1985
			JP 57164908 A	09-10-1982
			JP 1320290 C	29-05-1986
			JP 54109016 A	27-08-1979
			JP 56008085 B	21-02-1981
			LU 80626 A1	09-04-1979
			MX 155005 A	19-01-1988
			NL 7812020 A ,C	12-06-1979
			PL 211603 A1	27-08-1979
			SE 444183 B	24-03-1986
			SE 7812613 A	11-06-1979
			SU 1306482 A3	23-04-1987
			ZA 7806885 A	28-11-1979
			CZ 8201448 A3	12-04-1995
US 4399983	A	23-08-1983	LU 82227 A1	30-10-1981
			AU 6802181 A	10-09-1981
			CA 1158443 A1	13-12-1983
			EP 0036382 A1	23-09-1981
			JP 56136912 A	26-10-1981
			ZA 8101303 A	31-03-1982
WO 0022176	A	20-04-2000	AU 1138100 A	01-05-2000
			WO 0022176 A1	20-04-2000
			CN 1323357 T	21-11-2001
			EP 1137815 A1	04-10-2001
			JP 2002527616 T	27-08-2002
			US 6440195 B1	27-08-2002
EP 0735146	A	02-10-1996	NL 9500600 A	01-11-1996
			AT 181369 T	15-07-1999
			AU 685021 B2	08-01-1998
			AU 5030996 A	10-10-1996
			BR 9601175 A	06-01-1998
			CA 2172898 A1	30-09-1996
			CN 1144275 A ,B	05-03-1997
			DE 69602871 D1	22-07-1999
			DE 69602871 T2	13-01-2000
			EP 0735146 A1	02-10-1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/07527

PCI/EP 03/07527

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 0735146	A	ES 2135162 T3 PL 313551 A1 RU 2154110 C2 US 5662860 A ZA 9602540 A	16-10-1999 30-09-1996 10-08-2000 02-09-1997 02-10-1996	
US 5681526	A	28-10-1997	NONE	
EP 0756012	A	29-01-1997	JP 3167888 B2 JP 9041018 A BR 9603163 A DE 69604542 D1 DE 69604542 T2 EP 0756012 A1 IN 187548 A1 KR 221350 B1 US 5769923 A ZA 9606280 A	21-05-2001 10-02-1997 05-05-1998 11-11-1999 13-04-2000 29-01-1997 18-05-2002 15-09-1999 23-06-1998 11-02-1997
US 4852858	A	01-08-1989	DE 3713369 A1 AT 63573 T AU 587933 B2 AU 1413188 A BR 8801884 A CA 1307396 C CN 88102184 A ,B DD 281241 A5 DE 3862803 D1 EP 0291701 A1 GR 3002106 T3 HU 47729 A2 IN 168550 A1 JP 1043805 B JP 1558873 C JP 63282207 A KR 9200350 B1 SU 1641195 A3 TR 23606 A ZA 8802622 A	10-11-1988 15-06-1991 31-08-1989 17-11-1988 22-11-1988 15-09-1992 23-11-1988 01-08-1990 20-06-1991 23-11-1988 30-12-1992 28-03-1989 20-04-1991 22-09-1989 16-05-1990 18-11-1988 11-01-1992 07-04-1991 30-04-1990 22-02-1989